

# smart *lite*

Smart, Smarter Than any other ID Card Printer

RELIABLE  
QUALITY &  
PERFORMANCE

smart-L




smart-LD

*EMMY*  
to feed cards  
to set ribbon  
to replace printhead



## Print Staff Cards!!

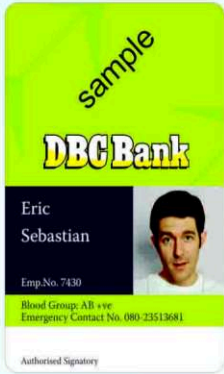

## School ID Card



## Print Visitor Cards!



## Print Photo Cards!!



## SPECIFICATIONS

PRINTING	SMART-L	SMART-LD
Print type	Dye-Sublimation	Dye-Sublimation
Print Area	Edge to Edge	Edge to Edge
Resolution	300 dpi	300 dpi
Dual Side Printing	Option	Yes
<b>Card</b>		
Card Feeding	Automatic	Automatic
Card Size	ISO CR-80 (54mm x 86/2.12" x3.38")	ISO CR-80 (54mm x 86/2.12" x3.38")
Card Thickness	0.38mm (15mil)-1.0mm(40mil)	0.38mm (15mil)-1.0mm(40mil)
Card Type	PVC, Composite PVC, PET	PVC, Composite PVC, PET
<b>Print Speed (Max.)</b>		
Monochrome	5 sec. (720 cards/hour)	5 sec. (720 cards/hour)
YMCKO	25 sec. (144 cards/hour)	25 sec. (144 cards/hour)
YMCKOK	30 sec. (120 cards/hour)	30 sec. (120 cards/hour)
<b>CAPACITY</b>		
Hopper Capacity	100 Card	100 Card
Stacker Capacity	40 Card	40 Card
<b>SYSTEM</b>		
Memory	64MB RAM	64MB RAM
Control Panel	2 LED Button	2 LED Button
Supported Platforms	Microsoft Windows 2000/2003/XP Window Vista 32 bites /Windows 7	Microsoft Windows 2000/2003/XP Window Vista 32 bites /Windows 7
Communications	USB	USB
Power Supply	Free Voltage (AC 110/220V, 50-60Hz	Free Voltage (AC 110/220V, 50-60Hz
Power Consumption	45W	45W
Temperature / Humidity	15-35 C / 20-80%	15-35 C / 20-80%
<b>Dimensions</b>		
Dimension (W x L x H)	170mmx420mmx195mm	170mmx510mmx195mm
Weight	4.5kg / 10lbs	5.5kg / 12lbs
<b>Encoding Option</b>		
Magnetic	ISO-7811 (Track I, II, III Red / Write), JIS II, HiCo/LoCo	ISO-7811 (Track I, II, III Red / Write), JIS II, HiCo/LoCo
Certifications	CE, UL, FCC, MIC	CE, UL, FCC, MIC

\* Specifications are subject to change without prior notice

# AVI Associates

15/3, 1st Main, 2nd Cross, A N Gupta Layout, Adugodi Post  
Bannerghatta Road, Bangalore - 560030

Tel : 080-42185055 / 42185060

e-mail : avi331@gmail.com, web : www.aviindia.net